

XIAMEN JNK STONE , Professional Supplier for Natural Stone in Europe & U.S. A

Help with Laying Natural Cobblestones (Setts)

Laying

To get started an adequate sub-base is required - approximately 75mm - 100mm for patios or pathways. If the cobbled area is for vehicular use, the sub-base should be deeper.

Joint Widths

A 12mm joint width is a fairly standard choice.

Bedding


Mix: a 5-7:1 sharp sand/cement wet mix is recommended.

Screed Bedding: Suitable for calibrated cobblestones. The bedding material needs to be spread across the whole area to be laid at a depth of 35-50mm thick.

Patterns

Fan or Radial

The larger the area to be covered, the more effective the fan pattern will look. Each radius should measure 1 metre using 100mm x 100mm cobblestones.

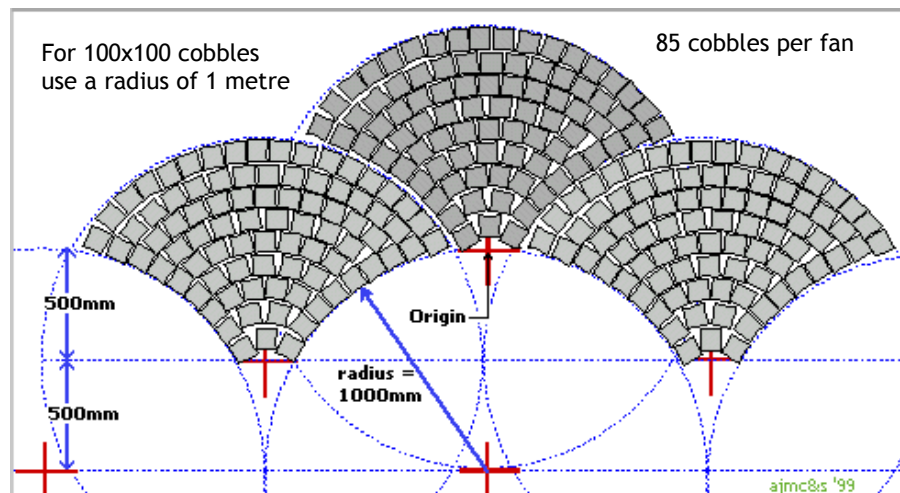

Staggered Joins

A variant to the normal straight lines, is laying the cobblestones with their joints staggered. This looks especially pleasing to the eye when using them for edging a patio or walkways.

Pointing

Xiamen JNK Co.,Ltd supply Feb Geofix compound which is suitable for pointing cobblestones, although it is rather expensive when there are so many joins to fill. Alternatively, a 4:1 building sand/cement mix is suitable used damp, not wet.

XIAMEN JNK STONE , Professional Supplier for Natural Stone in Europe & U.S. A

Category	Cobblestones
Product	> Sandstone > Dove Grey
Specification	
Application	External use
Finish	Hand dressed edges with a riven surface
Sizes Available	100mm x 100mm
Thickness	Calibrated to 35mm
Pack Weight	1 tonne = 12.5m ²
Unit of Sale	Per square metre
Delivered in	Bags or Crates depending upon quantity
Pre-drilled	N/A
Wastage Allowance	5% approximately
Variation in Colour	Low
Country of Origin	India
Alternative Colours	3 colours



Further images are available on our website: www.blackmountainquarries.com

Description

Our Dove Grey cobblestones give a beautiful finish to any garden design, as edging or as a modern patio area whilst being equally suitable for driveways or vehicle parking areas. Its blend of light blue with a silver grey shimmer blends perfectly with a range of traditional or modern materials to create the desired effect.

Coverage

88 cobblestones cover an area of 1 metre²

Specify:

Quantity required in square metres.

Note

Stone is a natural product and is subject to colour variations.